




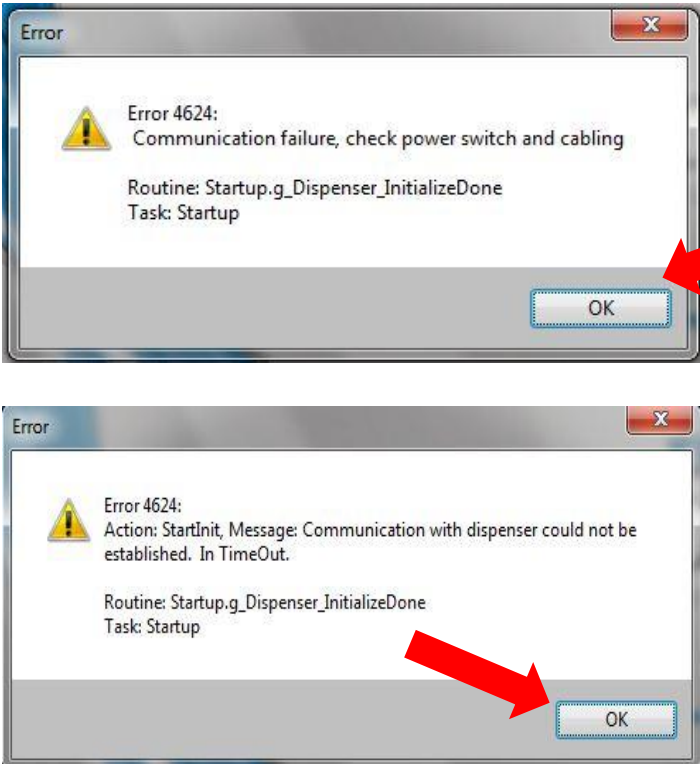
Fluid Management[®]



Fluid Management



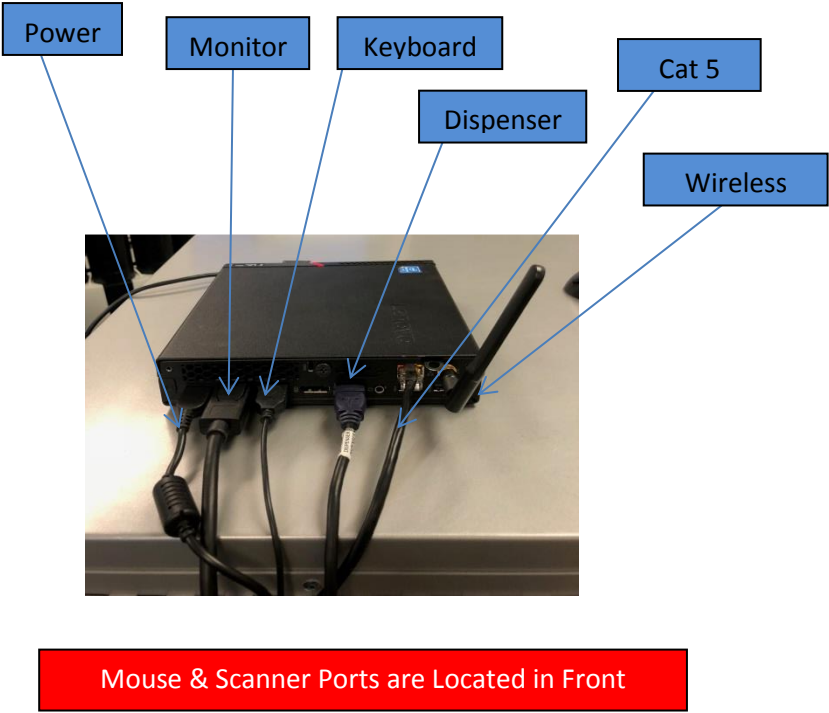


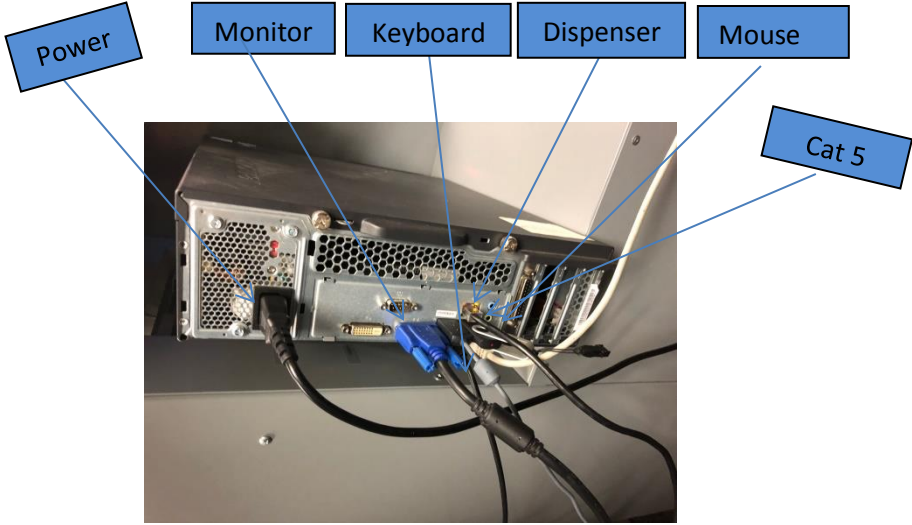
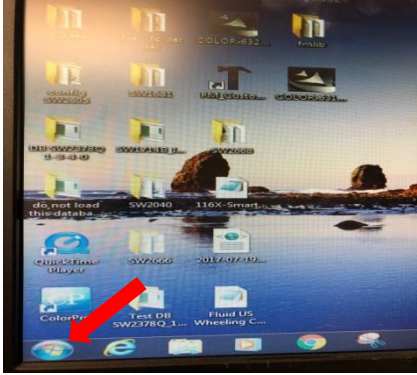
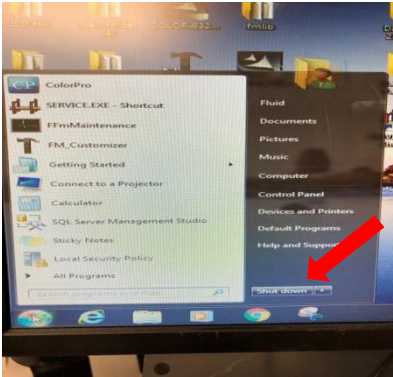

Fluid Management[®]


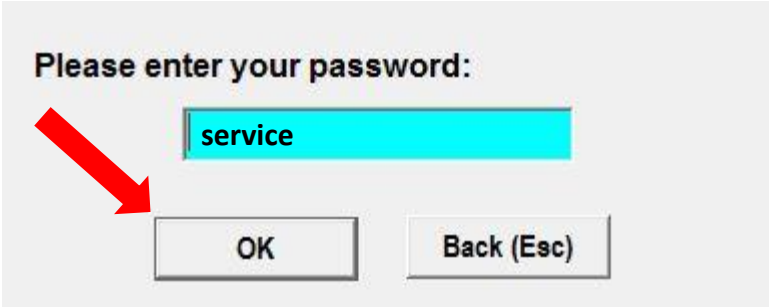
<i>Prepared by</i>	<i>Document Control Number</i>	<i>Document Title</i>	<i>Date</i>	<i>Rev</i>
Mike Hargett Terry Johnson	-	Fluid Management No Power to Unit	2/15/18	A

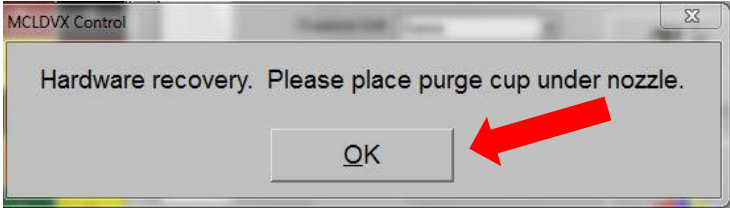
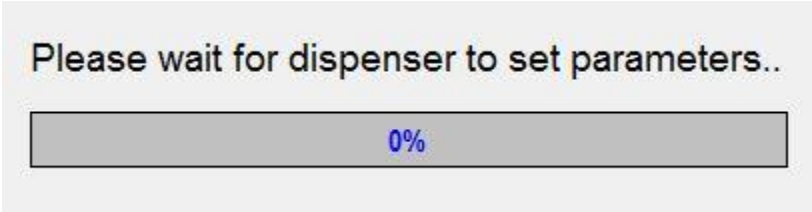
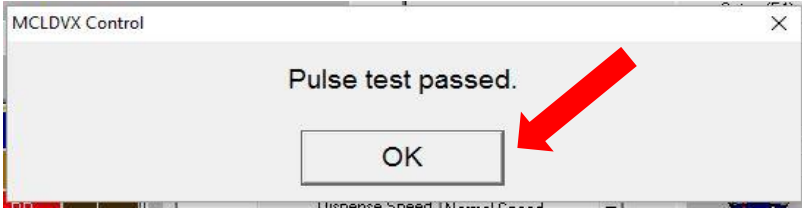
STEP	ACTION	INSTRUCTION
1.	Start Color Pro	<p>Color Pro Start Up Screen</p>  <p>The image shows the Color Pro 4 start-up screen. It features a blue liquid-like graphic on the left. The text reads: 'ColorPro⁴™', 'Custom software solution for paint.', 'checking for database updates', and the Fluid Management logo. At the bottom, it says '© Fluid Management, Inc 2016. All Rights Reserved.'</p>
2.	Receive Error	<p>Following errors may be displayed. Click <OK></p>  <p>The image shows two error dialog boxes. The top one has a yellow warning icon and the text: 'Error 4624: Communication failure, check power switch and cabling. Routine: Startup.g_Dispenser_InitializeDone. Task: Startup.' A red arrow points to the 'OK' button. The bottom one has a yellow warning icon and the text: 'Error 4624: Action: StartInit, Message: Communication with dispenser could not be established. In TimeOut. Routine: Startup.g_Dispenser_InitializeDone. Task: Startup.' A red arrow points to the 'OK' button.</p>

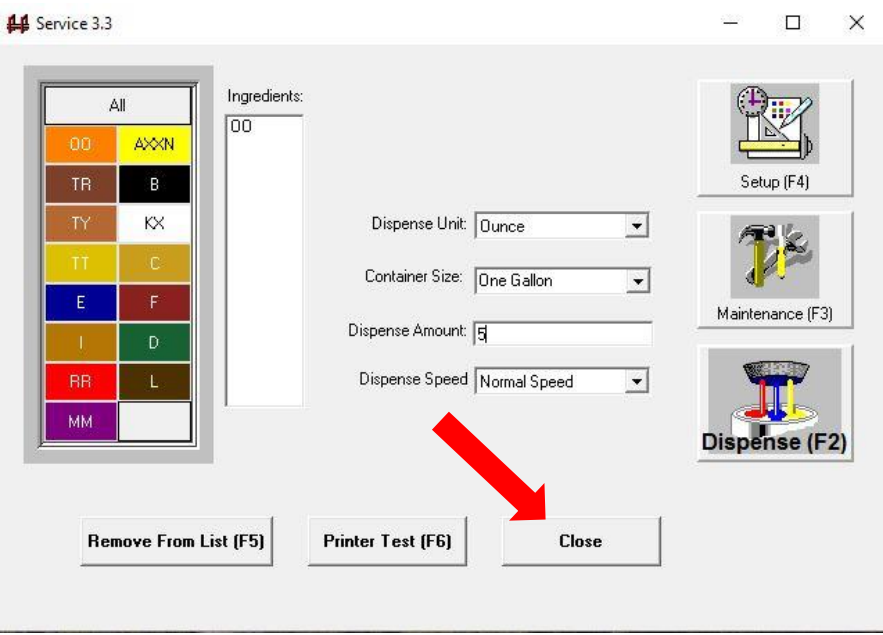
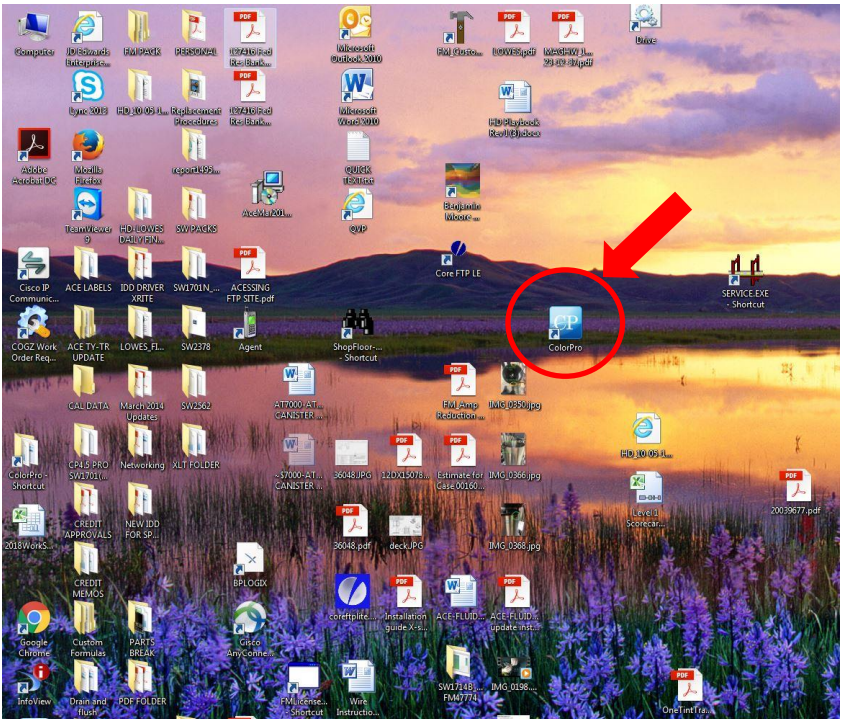
STEP	ACTION	INSTRUCTION
3.	Unit has no Power.	<p>Look for the LED Red Positioning lights under the Nozzle.</p> 
4.	Verify Power Cord is Connected	<p>Pull unit out from wall and look behind in the lower center and verify AC Power Cord is connected.</p> 

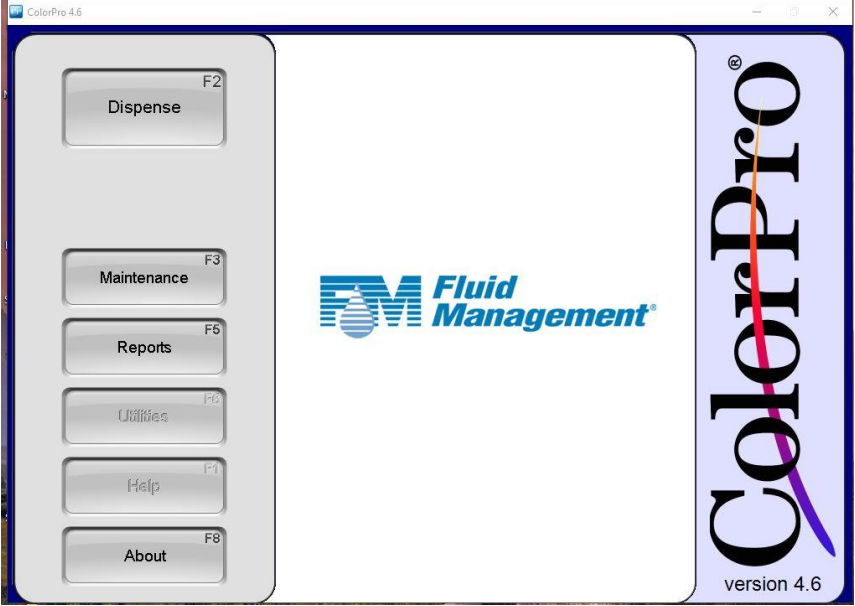
STEP	ACTION	INSTRUCTION
5.	Restore Power	<p>Plug in unit and Verify LED Positioning Lights are on.</p> <div style="display: flex; justify-content: space-around;">   </div>
6.	Verify Computer Connections	<div style="text-align: center;">  </div>

STEP	ACTION	INSTRUCTION
6.	Verify Computer Connections (Older Computer)	
7.	Reboot Computer	<p data-bbox="516 772 1365 842">Click the Windows Start Ball in the Bottom left corner. Click on <Shut Down> and completely turn off the computer.</p>  
8.	Turn On Computer	<p data-bbox="516 1365 1268 1402">Using the computer's power button turn on computer.</p> 

STEP	ACTION	INSTRUCTION
9	Open Service	<p>Double Click on the Red Bridge titled “SERVICE.EXE”</p> 
10	Enter Password	<p>Password is “service” – ALL LOWER CASE and click <OK></p> 

STEP	ACTION	INSTRUCTION
11	Place Purge Can	<p>Place daily purge can under Nozzle and click <OK></p>  <p>After clicking <OK> the unit will set parameters. This is NOT a purge.</p> 
12.	Parameters Set	<p>After a successful setting of parameters the following will be displayed. Click <OK></p> 

STEP	ACTION	INSTRUCTION
13.	Close Service	<p>Click <CLOSE> to exit Service 3.3</p> 
14.	Open Color Pro	<p>Double Click the Color Pro Icon</p> 

STEP	ACTION	INSTRUCTION
15.	Color Pro Opens	<p data-bbox="516 176 1203 212">Color Pro Opens – Power Restored – Unit Reset</p>  <p data-bbox="613 869 1390 940">If loss of power persists contact FM for Service Repair. Call: 1-800-462-2466 (Option 1)</p>